

B8T


Le B8T permet d'obtenir un échange thermique efficace dans des applications à faible débit qui exigent un espace restreint. Facile à installer et utiliser, ce produit est compact et polyvalent. C'est donc un bon choix pour diverses applications à une et deux phases, dans de nombreux secteurs industriels.



Spécifications de base


| | |
|------------------------------|--------------------------------------------------------------|
| Nombre de plaques max. (NoP) | 60 |
| Débit volumétrique max. | 4 m ³ /h (17.61 gpm) |
| Volume du canal | 0.039/0.039 dm ³ (0.0014/0.0014 ft ³) |
| Matières | Plaques en acier inoxydable 316, brasage cuivre |
| Poids sans les connexions | 0.85+(0.0749*NoP) kg 1.88+(0.165*NoP) lb |

Les dimensions standard

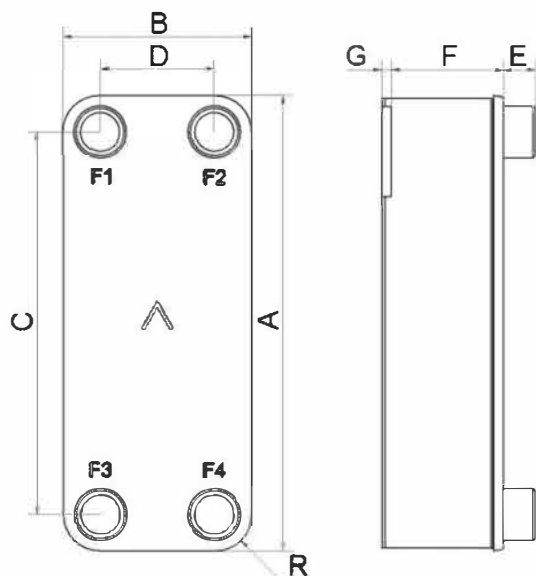





| # | MM | IN |
|-----|-----------------|-----------------|
| A | 317 | 12.48 |
| B | 76 | 2.99 |
| C | 278 | 10.94 |
| D | 40 | 1.57 |
| F | 4.00+2.24*(NoP) | 0.16+0.09*(NoP) |
| G | 7 | 0.28 |
| R | 18 | 0.71 |
| E_1 | 20 | 0.79 |

PED pression / température

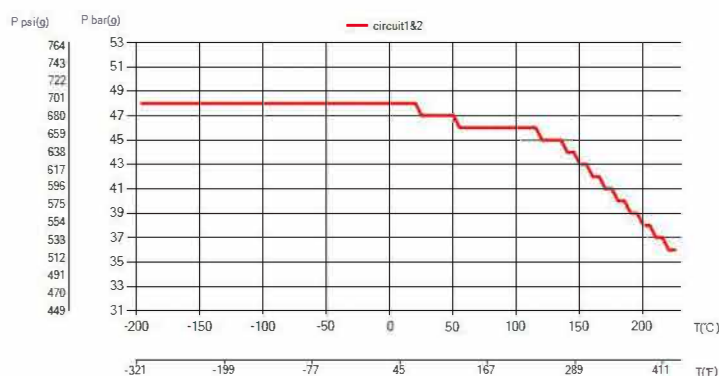

AXINTRA

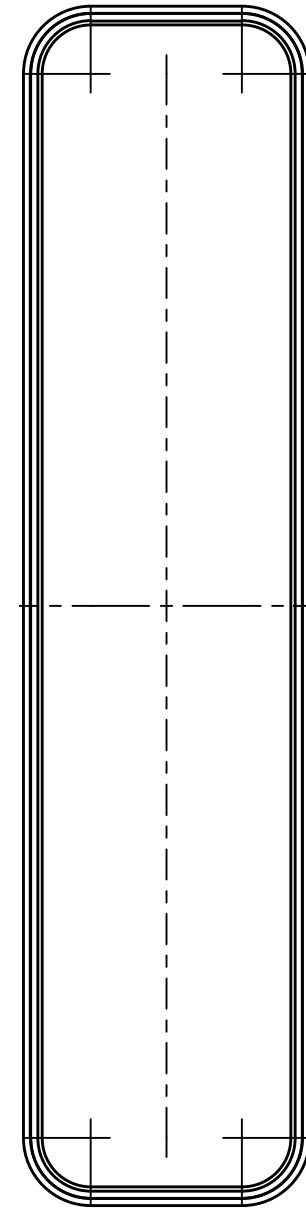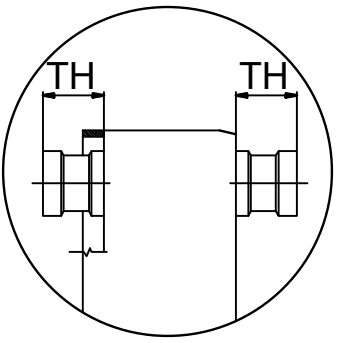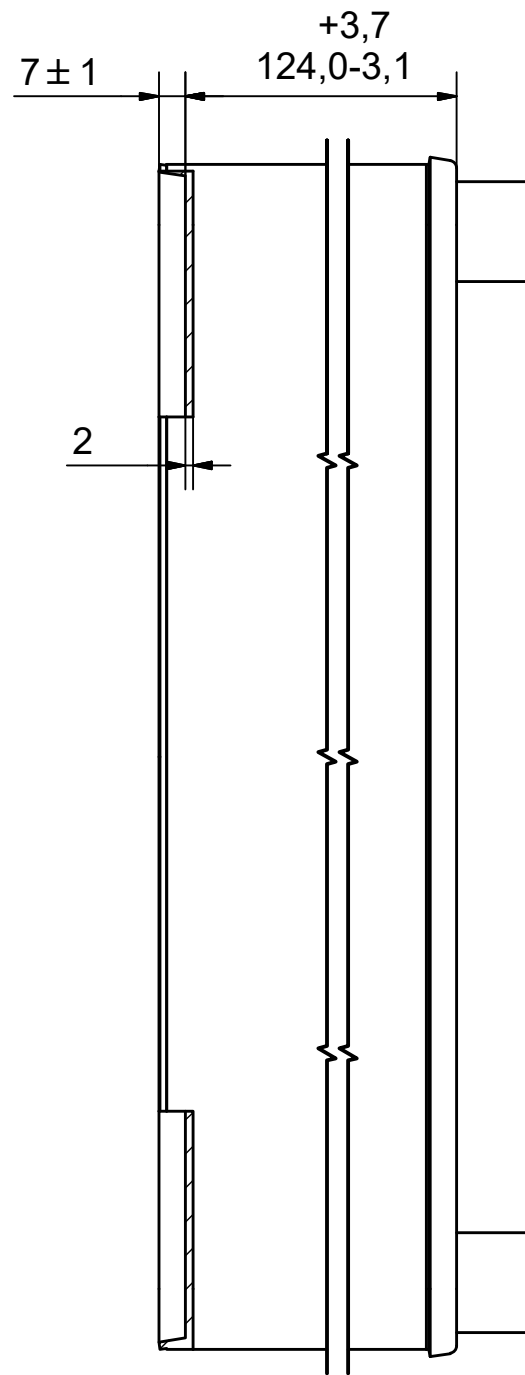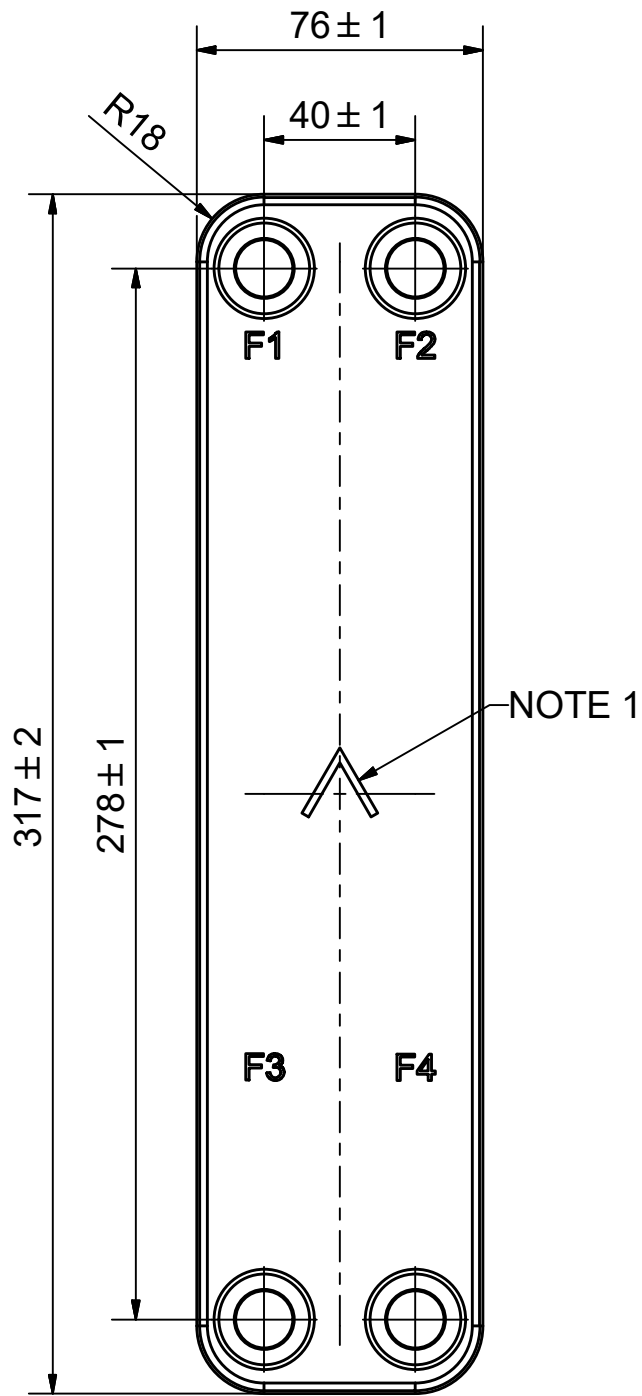

ÉCHANGEURS THERMIQUES



AXINTRA
ÉCHANGEURS THERMIQUES



NOTE 1 ALTERNATE MARKING: STICKER OR STAMP

| | | | |
|----|-------|-----------------------------------|----------|
| F4 | 32835 | ISO-G 3/4" & SOLDER 16, TH = 20,1 | CD000859 |
| F3 | 32835 | ISO-G 3/4" & SOLDER 16, TH = 20,1 | CD000859 |
| F2 | 32835 | ISO-G 3/4" & SOLDER 16, TH = 20,1 | CD000859 |
| F1 | 32835 | ISO-G 3/4" & SOLDER 16, TH = 20,1 | CD000859 |

| | | | |
|----------------------------------------------------------------------------------------------------------|------------------------------|----------------|---------------------------------------------------------------------------------------|
| Title | | B8TH/1P-SC-M | |
|  A DOVER COMPANY | Created Date | Created By |  |
| | 2018-12-02 | AU | |
| | Article/Configuration number | Drawing number | |
| | 14361-054 | AU00440573 | 1 |

| Pos | Article No | Title / Denomination, code, material, dimension etc | Drawing No./ref | Pos | Article No | Title / Denomination, code, material, dimension etc | Drawing No./ref |
|-----|------------|-----------------------------------------------------|-----------------|-----|------------|-----------------------------------------------------|-----------------|
|-----|------------|-----------------------------------------------------|-----------------|-----|------------|-----------------------------------------------------|-----------------|

| Rev No. | Alteration | Date | Checked | Approved |
|---------|------------------------|------------|---------|----------|
| 1 | CHANGED INNER DIAMETER | 2007/09/17 | ANL | PDM |

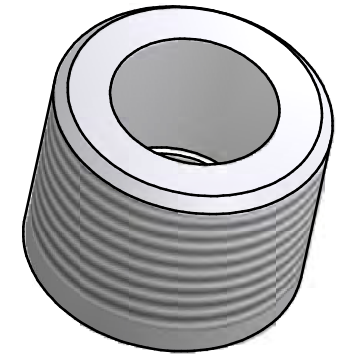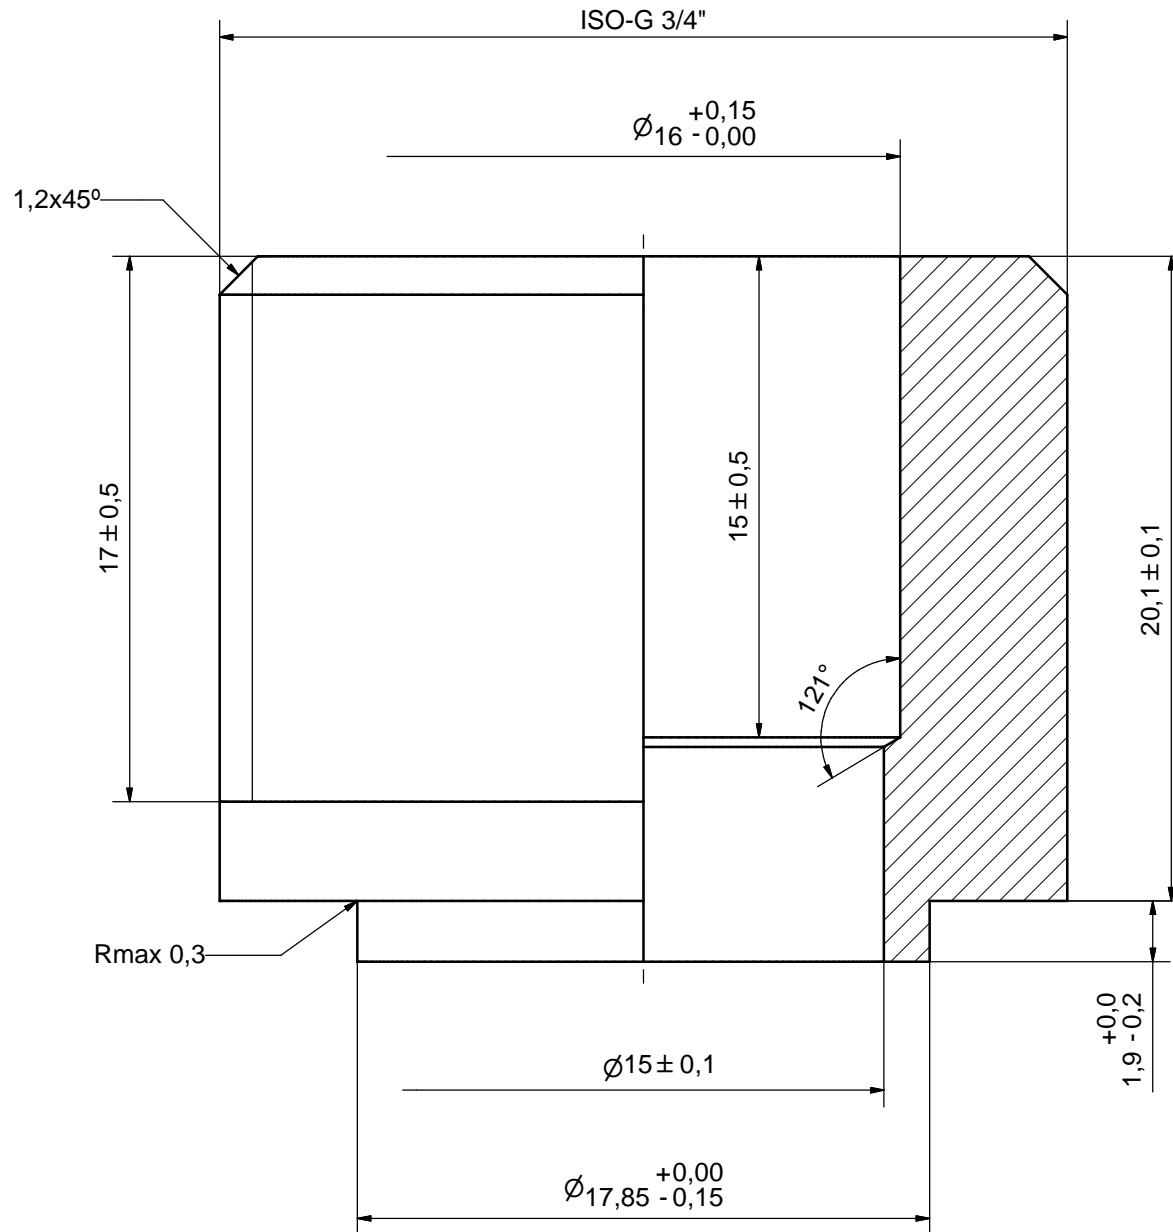

ACCORDING TO MQS
MATERIAL

| Drawn | Checked | Approved | Created Date | General geometrical tolerancing ISO 2768 | General surface finish R_a | Scale |
|---------------------------------|---------|----------------|------------------------|------------------------------------------|------------------------------|-------|
| ANL | PDM | PDM | 2007/04/25 | m | 3.2 | 5:1 |
| SUPER A DOVER COMPANY | | | | | | |
| Title | | | ISO-G 3/4" & SOLDER 16 | | | |
| Article number | | Drawing number | | Revision | | Sheet |
| - | | CD000859 | | 1 | | 1 (1) |